5000 series


L5082MK170E



Features

- CameraLink supports Full, Medium, Base and Deca mode with maximum 6.8Gbps bandwidth;
- Supports external trigger, free run mode and multiple modes;
- Supports Gamma correction, LUT and other ISP functions;
- Applies DC 24V power supply;
- Compatible with Cameralink protocol and GenICam standard;
- Comply with CE, FCC, UL, RoHS certifications.

Dimensions (mm)

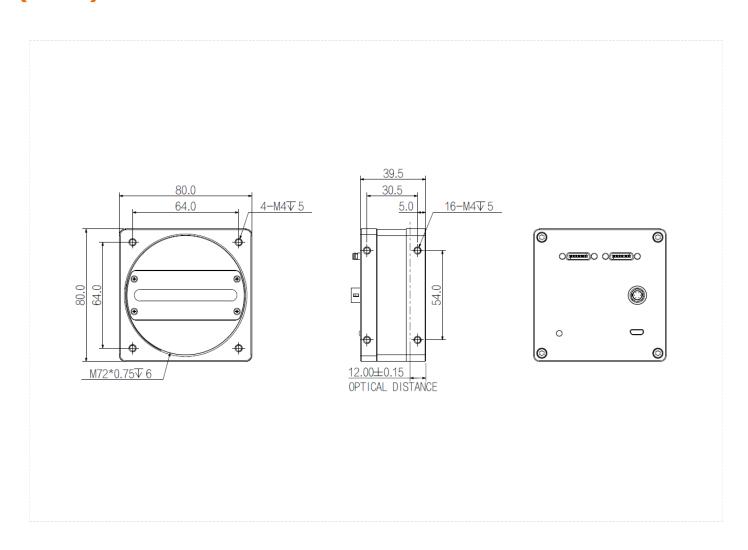




Specification

Model		L5082MK170E
	Sensor	8 K
	Image Sensor	CMOS
	Shutter	Global
	Resolution	8192 × 1
Basic	Line Rate	80 kHz
	Bit Depth	12
	Mono/Color	Mono
	Pixel Size	7 μm × 7 μm
	Pixel	8192 × 1
	S/N Ratio	46 db
	WDR	65.9 db
	Image Format	Mono8/10
	Binning	Support
T	ROI	Support
Image	X Flip	Support
	Gain	1~32
	Gamma	From 0 to 4, support LUT
	Exposure Time	2 μs~100 ms
	Trigger Mode	Software Trigger/Hardware Trigger/Free Run Mode
	FPN	Support
Doutowasasas	User Setting	Support two sets of user-defined configurations
Performance	Pixel Clock	34/51/68/85MHz
Dowt	Port	CameraLink
Port	Lens Mount	M72
Davier	Power Supply	DC12~24V power supply
Power	Power Consumption	5 W
.	Product Dimensions	80 mm × 80 mm × 39.5 mm (Not including rear case connector)
Structure	Net Weight	360 g
Environment.	Storage Temperature	- 30°C∼+80°C
Environment	Operating Temperature	- 30°C∼+50°C

Connector Pin-out

Definitions of carriera o-pin ports.	Definitions	of camera	6-pin	ports:
--------------------------------------	-------------	-----------	-------	--------

Pin	Description	Features
1	Power	+12VDC to 24VDC power supply
2		not connected
3		
4		
5		
6	GND	Camera DC power ground

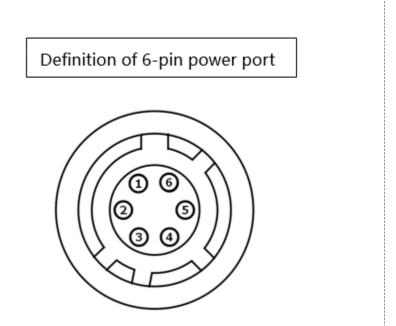

Spectrogram

